

Directional seat valves ATEX

Type WVMX / WVHX

NG 4
up to 12 l/min

Features

- Direct operated
- Leakage free
- Good resistance to corrosion
- As 2/2-, 3/2- or 4/2*-valve with solenoid actuation

* pilot-operated



CE  II 2G Ex e mb IIC T4 Gb

Design

- With hardened closing elements as cone or ball seat
- Solenoids with slide on coil technology turnable in 90° steps
- Mounting on single subplate (EAP) as stand-alone valve or in valve bank with subplate (APXH)

Application

- Hydraulic constructions in explosion-prone zones where devices marking **CE  II 2G c IIC T4 (Valve)** and **CE  II 2G Ex e mb IIC T4 Gb (Solenoid coil)** are needed according to RL 94/4 EG.

Technical Data

Hydraulic fluid	Mineral oil according to DIN 51524 with ignition temperatures up to 185 °C (other fluids on request)
Fluid temperature range	-20 up to 80 °C (in- and outflow)
Ambient temperature range	-20 up to 55 °C (multistation manifold mounting with min. clearance 14 mm) -20 up to 65 °C (individual mounting)
Viscosity range	5 up to 400 mm ² /s
Porting	NG 4
Max. operating pressure	500 bar (Type WVMX) 700 bar (Type WVHX) Pressure difference from P to A, B to T must be adhered ($p_p > p_A \geq p_B > p_T$)!
Duty cycle DC	100% (S1)
Max. flow rate	12 l/min
Filtration (recommendation)	According NAS 1638 class 6 resp. ISO/DIN 4406 17/15/12
DIN connector (2P + E)	According EN 175301-803 / ISO 4400 / DIN 43650
Power	24 VDC (17 W) / further versions on request!
Power tolerance	+/- 10%
Switching time	40 - 120 ms
Degree of protection	IP 63 (solenoid IP 66) according DIN 40050
Material (outer parts)	Corrosion-resistant steel and aluminium (coil housing: ZnNi - corrosion protection)

Ordering codes WVMX/WVHX

Example WVMX/WVHX		WV	M	X	-	4B	-	2	/	2	-	WS	-	24	-	V	-	A		00
Seated valve																				
Types	M	500 bar																		Special design 01 ... 99 (00 for standard)
	H	700 bar																		
Atex	X																			Part index Please leave blank (small letters a-d; defferent letters do not effect inter- changeability)
Nominal sizes	4																			
Connection Bieri	..B																			Desing revision Capital letters A-Z; iden- tical letters equal same connecting dimensions
Ports	2, 3 or 4																			
Positions	2																			
Functions	see product information valve types																			
Actuations	24	Magnet 24 VDC																		
Seal materials	V	FPM / other seal materials on request																		

Ordering codes APHX and EAP

Example APXH		APH	X	-	4	B	-	2	/	2	-	AT	-	G3/8	-	V	-	A		00
Subplate ATEX																				
ATEX																				
Nominal sizes	4	NG 4																		
Interface type	B	connection Bieri																		
Ports	2, 3 or 4																			
Positions	2																			
Internal connection	PA P - A (function 2/2) AT A - T (function 2/2) PT P - T (function 2/2) X for 3/2 and 4/2																			
Threaded connections	G3/8 G 3/8"-connection X no external port (P - T)																			
Seal materials	V [FPM] other seal materials on request																			
Special design 01 ... 99 (00 for standard)																				
Part index Please leave blank (small letters a-d; different letters do not effect interchan- geability)																				
Desing revision Capital letters A-Z; identical letters equal same connec- ting dimensions																				

Example EAP		EAP	-	4	B	-	2	/	2	-	G3/8	-	A		00
Single subplate															
Nominal size	4	NG 4													
Connections	B	connection Bieri													
Ports	2, 3 or 4														
Positions	2														
Threaded connections	G1/4 G 1/4"-connection G3/8 G 3/8"-connection G1/2 G 1/2"-connection														
Special design 01 ... 99 (00 for standard)															
Part index Please leave blank (small let- ters a-d; defferent letters do not effect interchangeability)															
Desing revision Capital letters A-Z; identical letters equal same connecting dimensi- ons															

Type WVMX/WVHX

NG 4
up to 12 l/min


Spare parts set

Items list	Part No.
5 pcs. O-Ring, 5x1,5 mm, FPM	3853409
5 pcs. O-Ring, 8x1,5 mm, FPM	
4 pcs. Fixing screw, M6x35 mm	
4 pcs. Fixing screw, M6x60 mm	
1 pce. Seal cover plate for port B	

Solenoids	Part No.
Solenoid 24 VDC	4006062
Solenoid 110 VAC	4006150
Solenoid 230 VAC	4006151

Accessories

Type	Valve type	Item description	Part No.
RVH700-4B-D6,5-X-A*00	2/2, 3/2, 4/2, 3/3	Check valve (fitting in connection P)	3680704
RDH700-4B-D6,5-X-A*00	2/2, 3/2, 4/2, 3/3	Return pressure stop (fitting in connection T)	3687580



Product information 2/2-valves

Functions WO and WS


Operating pressure max. [bar]	Actuation	Weight ca. [kg]	Part No.	
			2/2-WO	2/2-WS
700 bar	24 VDC	1,9	3986173	3986174
500 bar	24 VDC	1,9	3986226	3966527

Notes:


Further actuations on request!
Characteristics see pages 12-13!

Hydraulic symbol

2/2-WO






2/2-WS



Dimensional drawing

View A



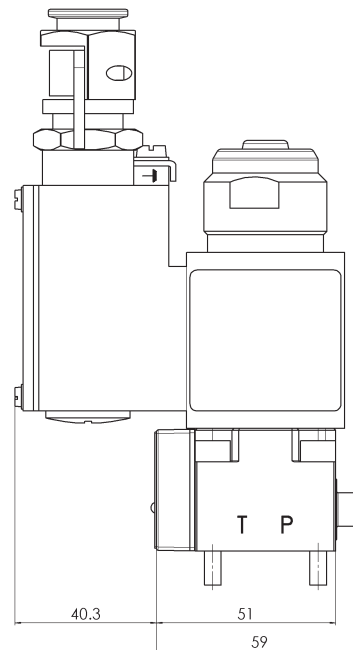
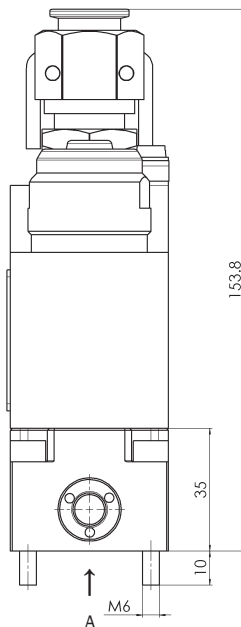
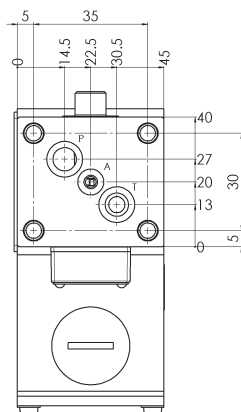


**Subplates APXH for 2/2-valves
(valve bank - example see page 12)**

Internal connection	Threaded connection ["]	Weight ca. [kg]	Part No.
P - A	G 3/8	0,50	3986252
A - T	G 3/8	0,50	3986266
P - T	-	0,50	3986267

Notes:

Mounting elements for APXH have to be ordered seperately (see page 11)!

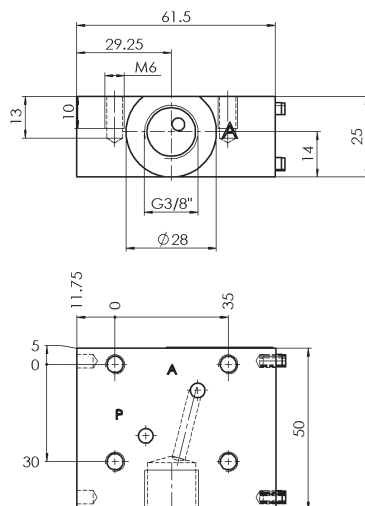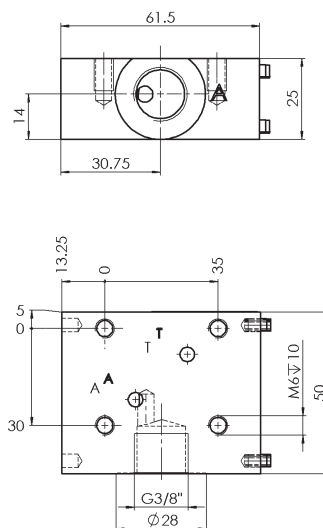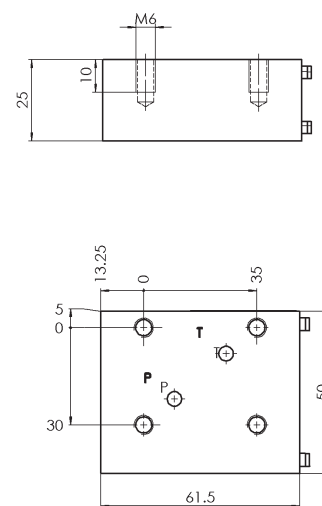Hydraulic symbols**P - A****A - T****P - T****Dimensional drawings****P - A****A - T****P - T**

Single subplates EAP for 2/2-valves (in-line mounting)


Threaded connection ["]	Weight ca. [kg]	Part No.
G 1/4	0,45	3763413
G 3/8	0,45	3807978
G 1/2	0,45	3832462

Hydraulic symbol




Dimensional drawings


G 1/4"

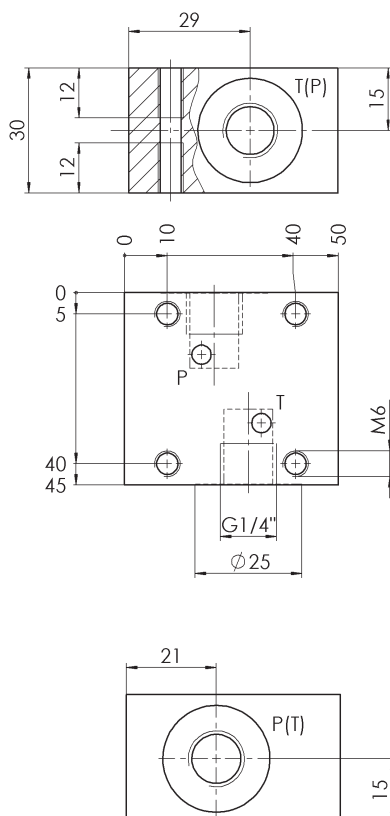

G 3/8"

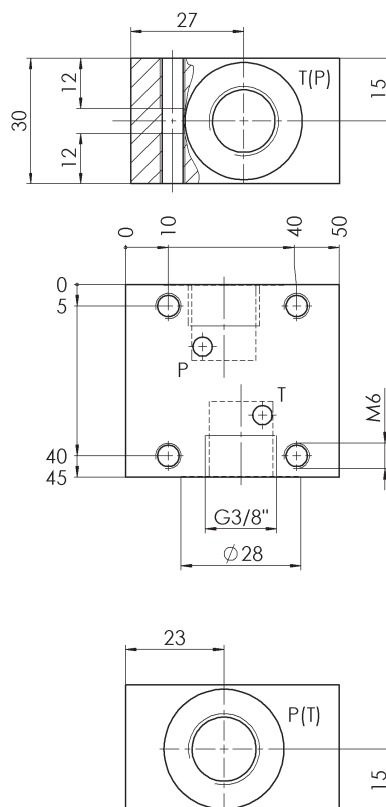

G 1/2"

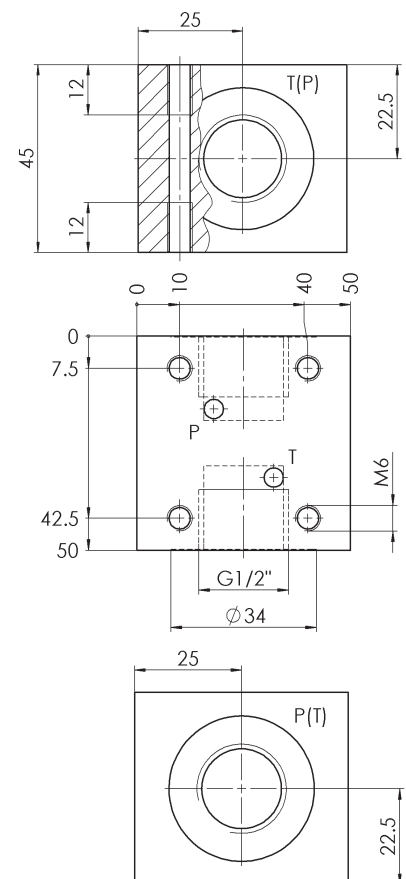

Product information 3/2-valves

Functions L and N


Operating pressure max. [bar]	Actuation	Weight ca. [kg]	Part No.	
			3/2-L	3/2-N
700 bar	24 VDC	1,9	3986220	3986223
500 bar	24 VDC	1,9	3935067	3986250

Notes:


Further actuations on request!
Characteristics see pages 12-13!

Hydraulics symbol

3/2-L






3/2-N



Dimensional drawing

View A

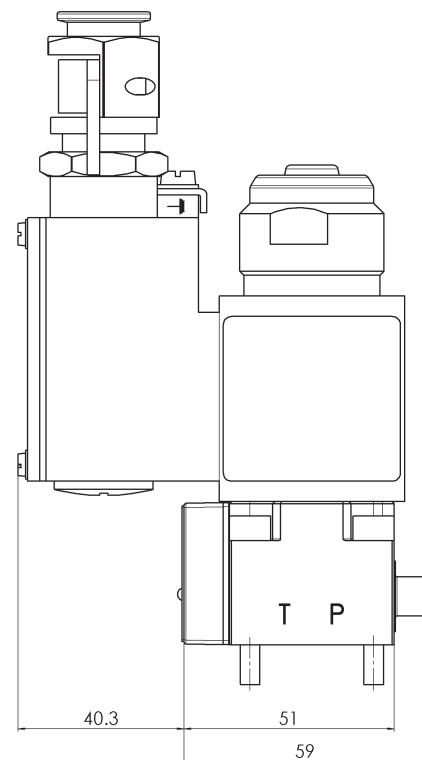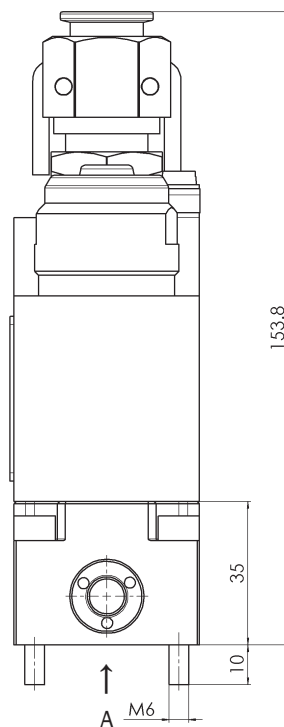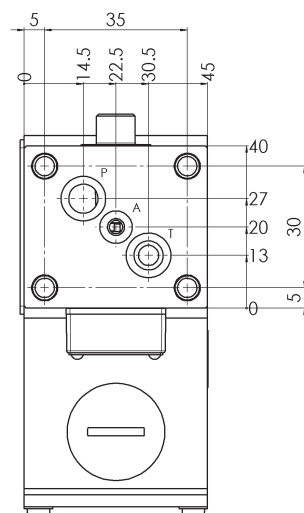


Subplate APXH for 3/2-valves (valve bank - example see page 12)

Threaded connection ["]	Weight ca. [kg]	Part No.
G 3/8	0,50	3979196


Notes:

Mounting elements for APXH have to be ordered separately (see page 11)!

Hydraulic symbol



Dimensional drawing

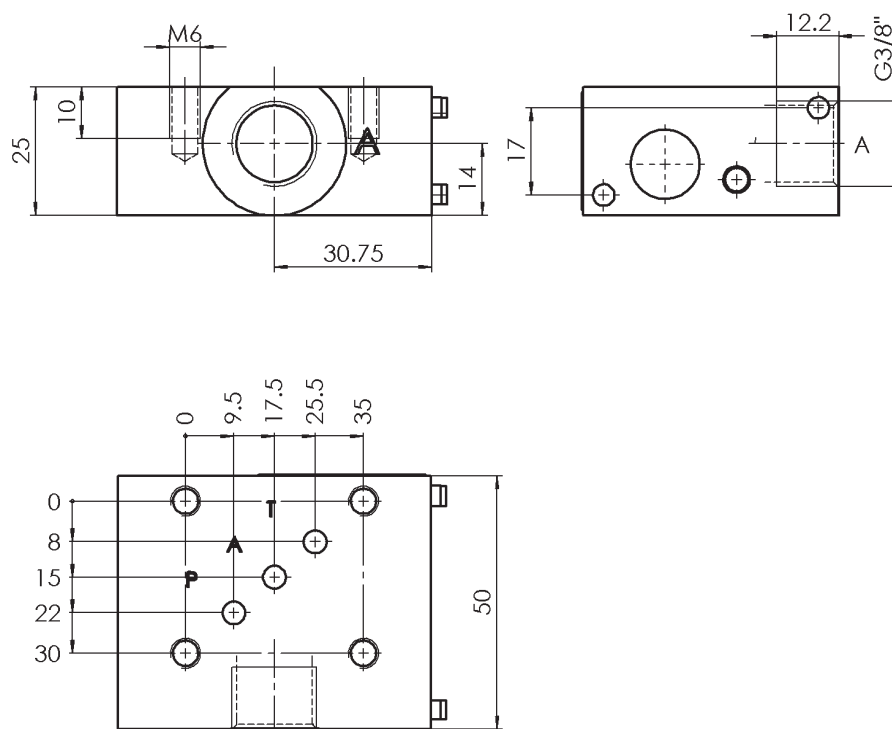

Product information 4/2-valves

Functions C and D

Operating pressure max. [bar]	Actuation	Weight ca. [kg]	Part No.	
			4/2-C	4/2-D
700 bar	24 VDC	2,2	3986215	3986218
500 bar	24 VDC	2,2	3986234	3986246

Notes:


Further actuations on request!
Characteristics see pages 12-13!
Seal cover plate (see spare parts set page 3) has to be mounted in port B when a subplate from Bieri is used!

Hydraulic symbols

4/2-C






4/2-D



Dimensional drawing

View A

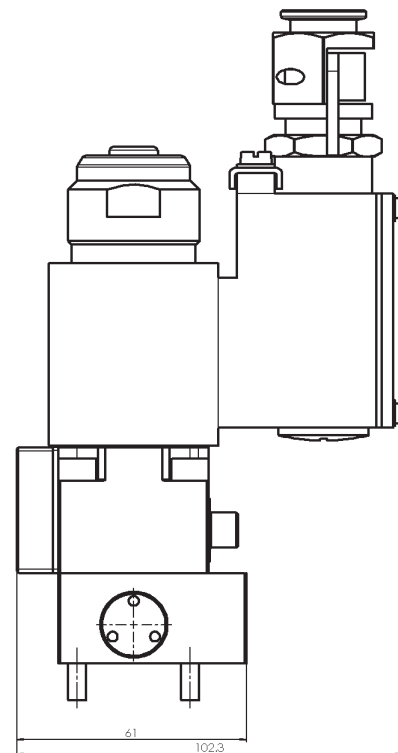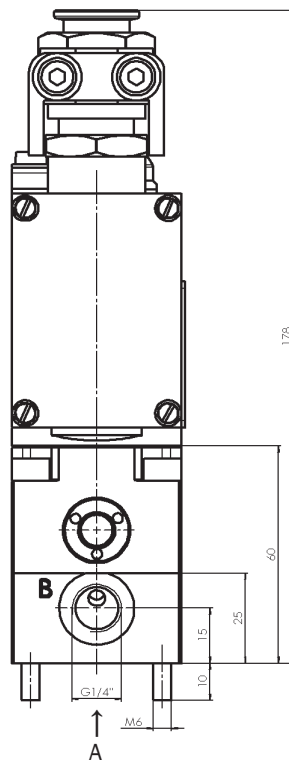
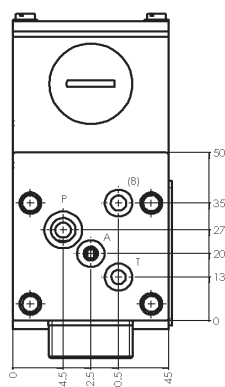


**Subplates APXH for 4/2-valves
(valve bank - example see page 12)**

Threaded connection ["]	Weight ca. [kg]	Part No.
G 3/8	0,50	3986270




Notes:

Mounting elements for APXH have to be ordered separately (see page 11)!

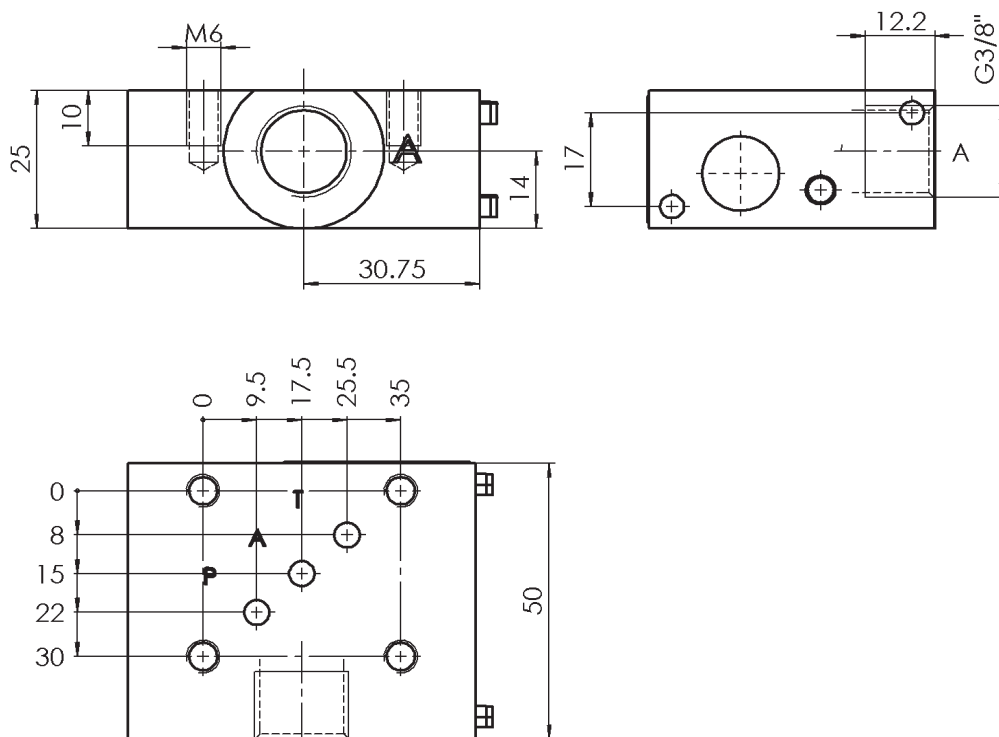Hydraulic symbol**Dimensional drawing**

**Single subplates EAP for 4/2-valves
(in-line mounting)**

Threaded connection ["]	Weight ca. [kg]	Part No.
G 1/4	0,45	3832534
G 3/8	0,45	3832535
G 1/2	0,70	3832533

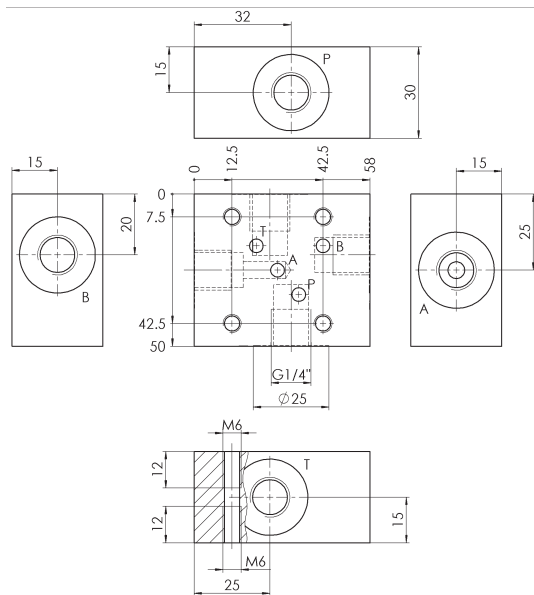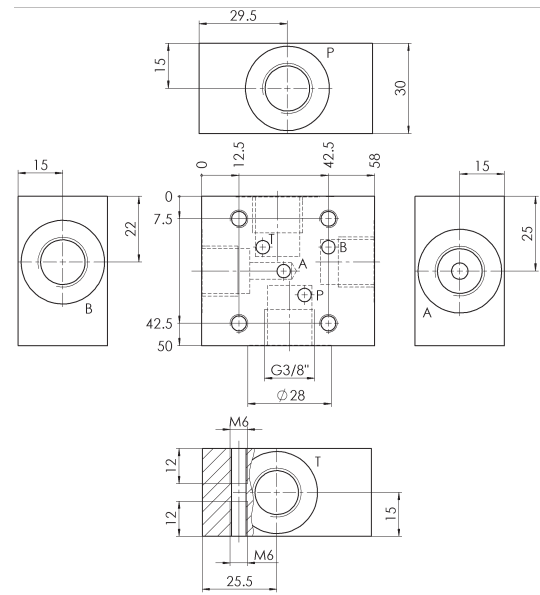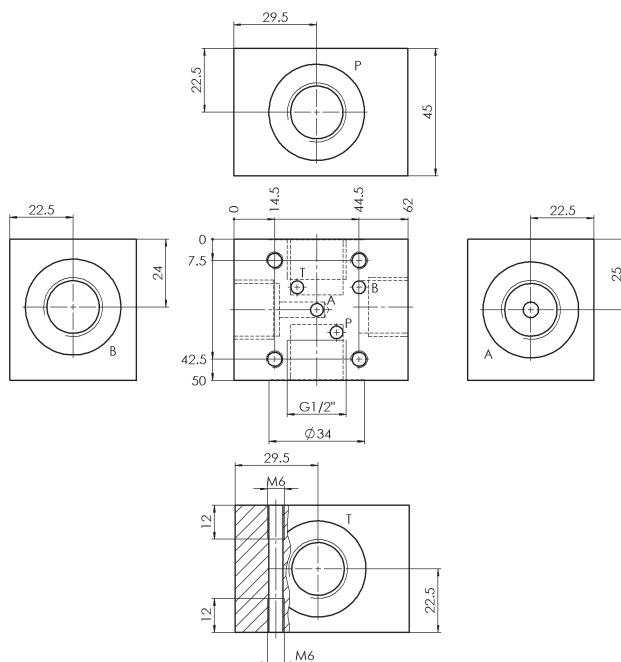Hydraulic symbol**Dimensional drawings****G 1/4"****G 3/8"****G 1/2"**

Type WVMX/WVHX	
NG 4 up to 12 l/min	


Valve bank (example see following page)

Mounting elements for subplates APXH


Item description	Dimensions	Weight ca. [kg]	Part No.
Subplate „starting block“ / without connection for DV	see drawing below	0,30	3845391
End plate	see drawing below	0,10	3845392
Tie bolt	see drawing below	see dimensional table below	see dimensional table below
Cap nut	see drawing below	-	6112447
Usit-ring	10,35 x 16 x 2 mm	-	6116776

Dimensional drawings


End plate

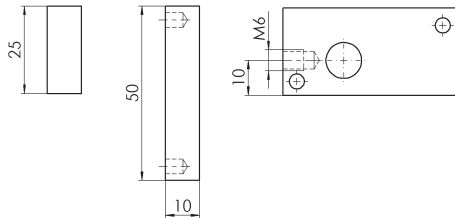


Usit-ring



Cap nut




Tie bolt

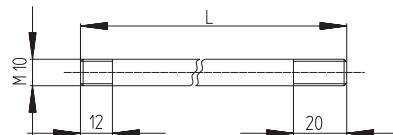

Subplate „starting block“


(without connection for pressure relief valve)

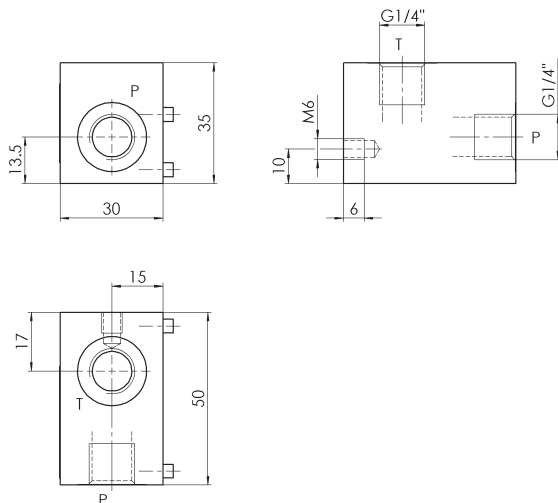

Dimensional table tie bolts


Number of sections [section length = 46 mm]	Length [mm]	Part No.	Weight ca. [kg]
1	95,5	on request	0,06
2	157,0	on request	0,10
3	218,5	3689284	0,13
4	280,0	on request	0,18
5	341,5	on request	0,21
6	402,5	3689299	0,25

Example valve bank

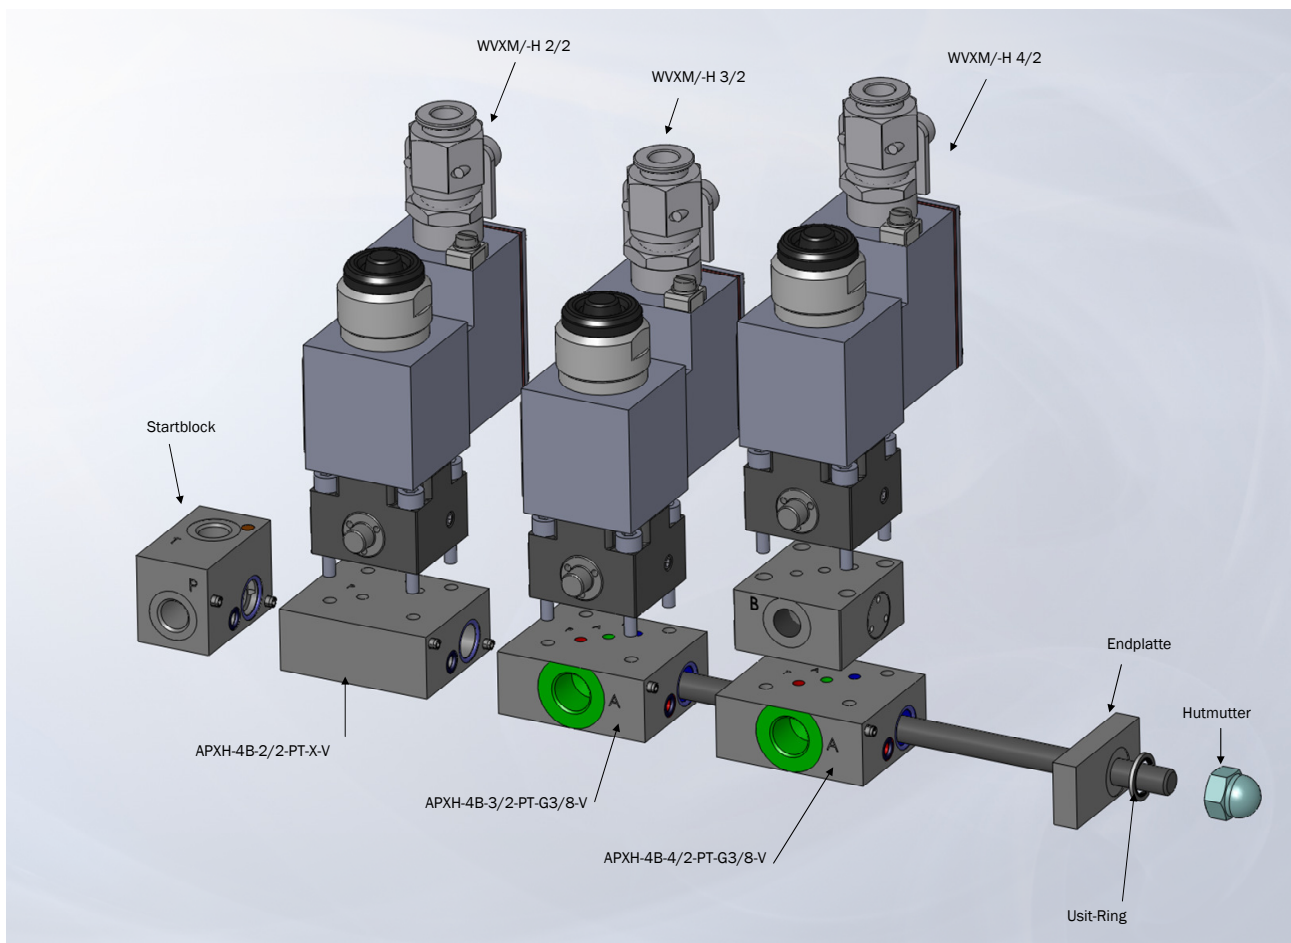


Characteristics

Pressure drop

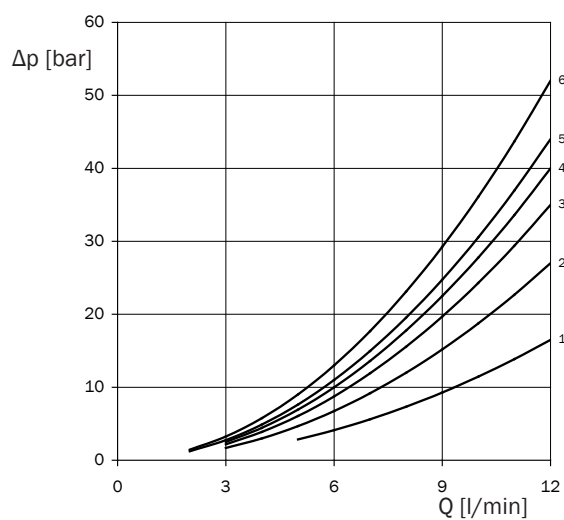

Valve type	P - A	P - B	A - T	B - T	P - T
4/2-C	5	3	6	5	
4/2-D	5	5	5	6	
3/2-L	4		6		
3/2-N	3		4		
2/2-WO					1
2/2-WS					2

() = for mid-position

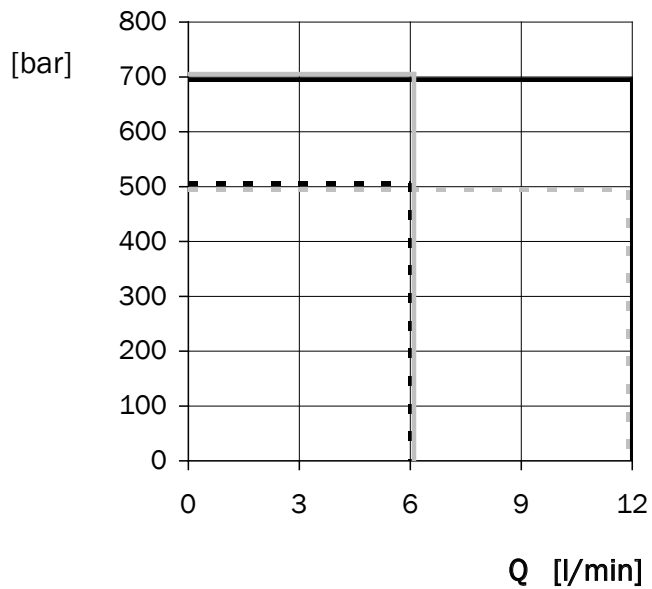Hydraulic operating powerlimits

Hydraulics operating powerlimits at rated voltage and ambient temperature $T_a = 40^\circ \text{C}$.

- - C, D, L, N, WO (Type WVMX)
- - WS (Type WVMX)
- C, D, L, N, WO (Type WVHX)
- WS (Type WVHX)